



cargo

line



Cargo line:




From Trust For Elevators

We develop Goods Lifts projects taking very much into account the load to be transported by the lift and applying criteria of robustness required by this type of product.



DOORS & DRIVE

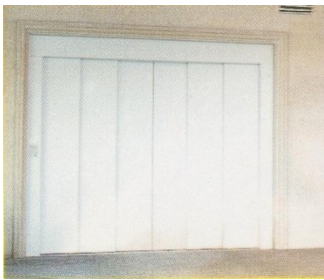

6

Automatic doors with 6 panels, double telescopic central opening, in steel plate prime painted.

Optional: Finished in hairline stainless steel.



4

Automatic doors with 4 panels, double telescopic central opening, in steel plate prime painted.

Optional: Finished in hairline stainless steel.



2

2 panel, central opening swing doors, in steel plate prime painted.

Optional: Finished in hairline stainless steel.


Hydraulic driven lifts are normally installed on 2 or 3 stop buildings and low traffic requirements. Standard nominal speeds are 0.40 - 0.50 - 0.63 m.p.s. and the pump room may be installed up to a maximum distance 15 meters away from the shaft.

Traction driven lifts are normally installed on buildings having 3 or more intense traffic. The standard nominal speeds are 0.50 - 1.00 m.p.s.


Optional:

- Frequency inverter (for high leveling accuracy)
- Speed of 1.60 m.p.s.

Hydraulic

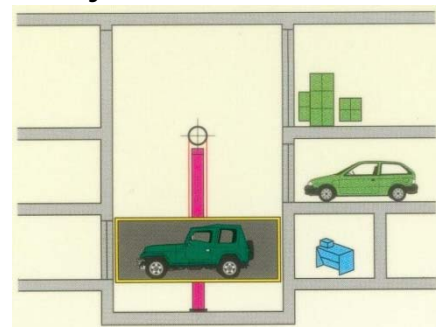

Traction

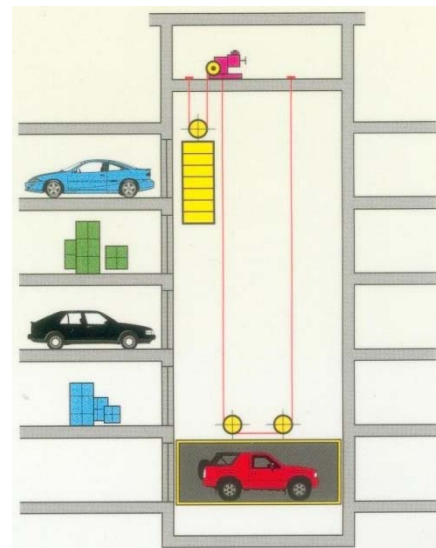

MOTORCAR LIFTS



Car in Steel Plate Painted Finish, floor in chequered plate, car station, recessed lighting in the ceiling, automatic doors and photocell in the door entrance.

Optional:

- Through-car arrangement.
- Car in Stainless Steel.

GOODS LIFTS




Car in Steel Plate Painted Finish, floor in chequered plate, car station, recessed lighting in the ceiling, automatic doors and photocell in the door entrance.

Optional:

- Through-car arrangement.
- Car in Stainless Steel.
- Reinforced ceiling to take single rail support

LAY-OUT

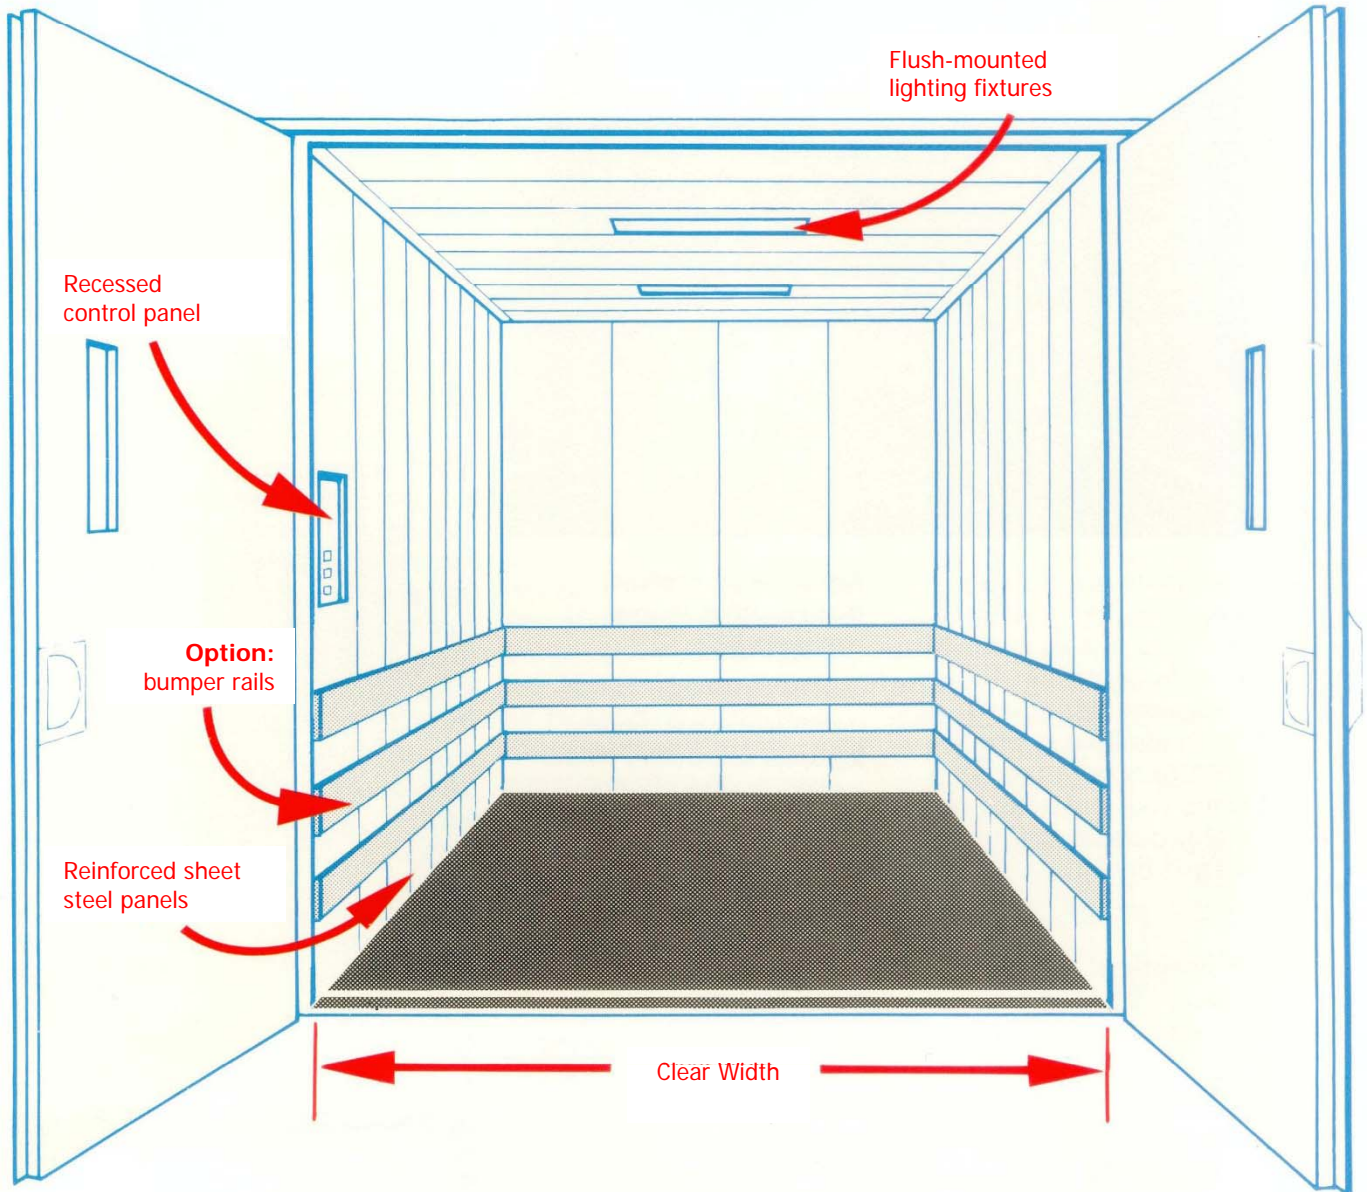

PROJECT DATA



Hydraulic Motorcars

Model	Load Kg	Doors Position	Cabin Width	Cabin Depth	Cabin Height	Door Width	Door Height	Shaft Width	Shaft Depth	Pit	OH
050-045-AC	3700	In Line	2500	5300	2300	2300	2000	3450	5650	1300	3600
050-045-AC	3700	Through	2500	5300	2300	2300	2000	3450	5800	1300	3600

The Dimensions of Shaft are to fit Automatic Sliding Doors; With Cantilevered Doors on lift Shaft, the Depth needs to be Increased by 160mm.

Hydraulic Motorcars Pump Room Adjacent to Shaft on Lower Level	Model	Room Width	Room Depth	Room Height	R Door Width	R Door Height	Ventilation Opening
	050-045-AC	2500	3000	2000	800	2000	Required

Hydraulic Goods Lifts

Model	Load Kg	Doors Position	Cabin Width	Cabin Depth	Cabin Height	Door Width	Door Height	Shaft Width	Shaft Depth	Pit	OH
020-050-AC	1500	In Line	1500	2250	2300	1400	2000	2450	2550	1300	3600
027-055-AC	2000	In Line	2000	2100	2300	1800	2000	2950	2400	1300	3600
040-050-AC	3000	In Line	2300	2500	2300	2000	2000	3250	2800	1300	3600
020-050-AC	1500	Through	1500	2250	2300	1400	2000	2450	2650	1300	3600
027-055-AC	2000	Through	2000	2100	2300	1800	2000	2950	2500	1300	3600
040-050-AC	3000	Through	2300	2500	2300	2000	2000	3250	2900	1300	3600

The Dimensions of Shaft are to fit Automatic Sliding Doors; With Cantilevered Doors on lift Shaft, the Depth needs to be Increased by 160mm.

Hydraulic Goods Lifts Pump Room Adjacent to shaft on the lower level	Model	Room Width	Room Depth	Room Height	R Door Width	R Door Height	Ventilation Opening
	020-050-AC	2300	2600	2000	800	2000	Required
	027-055-AC	2500	2800	2000	800	2000	Required
	040-050-AC	2500	3000	2000	800	2000	Required

Traction Goods Lifts

Model	Load Kg	Doors Position	Cabin Width	Cabin Depth	Cabin Height	Door Width	Door Height	Shaft Width	Shaft Depth	Pit	OH
020-050-AC	1500	In Line	1500	2250	2300	1400	2000	2450	2550	1300	3600
027-055-AC	2000	In Line	2000	2100	2300	1800	2000	3000	2400	1300	3600
040-050-AC	3000	In Line	2300	2500	2300	2000	2000	3250	2800	1300	3600
020-050-AC	1500	Through	1500	2250	2300	1400	2000	2450	2650	1300	3600
027-055-AC	2000	Through	2000	2100	2300	1800	2000	3000	2500	1300	3600
040-050-AC	3000	Through	2300	2500	2300	2000	2000	3250	2900	1300	3600

The Dimensions of Shaft are to fit Automatic Sliding Doors; With Cantilevered Doors on lift Shaft, the Depth needs to be Increased by 160mm.

Traction Goods Lifts Machine Room Directly Above Shaft	Model	Room Width	Room Depth	Room Height	R Door Width	R Door Height	Ventilation Opening
	020-050-AC	3000	3200	2000	800	2000	Required
	027-055-AC	3500	3100	2000	800	2000	Required
	040-050-AC	3800	3500	2000	800	2000	Required